

NDIR SO₂F₂ SENSOR MODULE

LARK-1M SO₂F₂ 6%vol| Order NO.: 001-080N-102

DATASHEET

Applications

- SO₂F₂ stifling monitoring

Merits

- Low Detection Limit
- Wide Temperature Range
- Small Size
- Long Life
- Fast Response

Dimensions

- Length: 126 mm ± 1 mm
- Width: 51 mm ± 1 mm
- Height: 39 mm ± 1 mm
- Weight: 208 g ± 5 g
- Screw Hole Diameter: 3 mm


Parameters

Principle	NDIR
Range	0 ~ 60000ppm SO ₂ F ₂
Sampling Mode	Pumping
Response Time	≤ 6 s (@500 ml/min)
Recovery Time	≤ 6 s (@500 ml/min)
Long-term Stability*	TBD
Temperature	-10 °C ~ 50 °C
Tolerance	± 150ppm (less than 10000ppm) ± 300ppm (10000ppm ~ 20000ppm) ± 600ppm (20000ppm ~ 60000ppm)
Temp. Drift	< ± 300ppm
Resolution	20 ppm/sec
Reading Unit	ppm
Detection Limit	100 ppm

*Long-term Stability: 28 days of zero drift measured in clean air of 0~90% RH、0~35 °C

Mechanics

Optic Path	Steel
Circuit Board	FR4 / Lead-free HASL
Solder	Sn / Ag / Cu
Mounting Plate	ABS

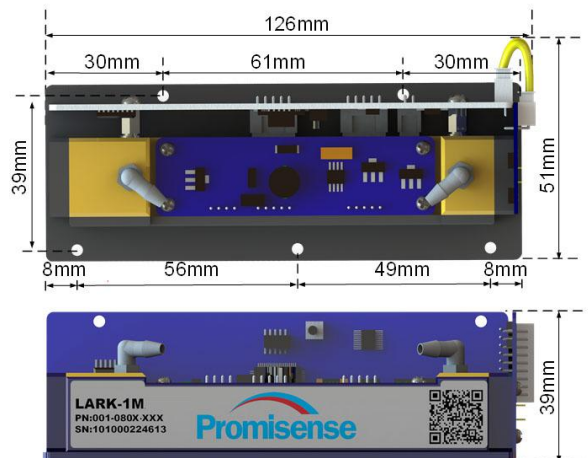


DATASHEET

Electrical Parameters

Input Voltage	9 ~ 24 VDC (#9 pin)
Operating Current	< 0.15 A @9 VDC
Warm-up Time	3 minutes (Tolerance ± 300 ppm)
	60 minutes (Tolerance ± 600 ppm)
Output Voltage	0.4 ~ 2.0 VDC (#2 pin) (0.3 ~ 0.4 V for Negative Reading)
Warranty	18 months*

Connector Definition



1.ALM	2.V _{out} (DAC)
3.RXD(TTL)	4.TXD(TTL)
5.RXD(RS232)	6.TXD(RS232)
7.CS1*	8.GND
9.PWR DC	10.GND



*CS1: 0-3.3 VDC Output, for RS485

Application Condition

Prefer Condition	Room Temperature, Dry, Clean
Safety	None Explosion-proof Design
Temperature	-10 °C ~ 50 °C
Humidity	0% RH ~ 85% RH (No Condensation)
Flow Rate	300 ~ 800 ml/min
Pressure	0.5 ~ 1.5 ATM (Ambient air pressure measured, without pressure compensation)

Accessory

Tygon Tube

- Length 50 mm × 2
- Diameter 3.2 mm × 6.4 mm
- Polyethylene, Transparent

Ribbon Cable

- Length 200 mm × 1
- 10-pin, 28 AWG, Gray
- Female Connector, 2 × 5
- 2.54 mm Pitch

*Non-warranty Case:

- Polluted by condensation, water or dust; Dust and water removing is strongly suggested;
- Damaged by falling, hitting, disassembling, etching or over-loading;
- Label has been torn.

We reserves the right to modify this datasheet and will optimize the product in the future. If you use this product for specific application, please contact us for more technical support.