

NDIR HCOOH SENSOR MODULE

LARK-1QM HCOOH 50000PPM | Order No.: 001-0A21-B02

DATASHEET



Parameters

Principle	NDIR
Range	0 ~ 50000 ppm HCOOH
Sampling Mode	Pumping
Response Time	T90 ≤ 20 s (@500 ml/min)
Recovery Time	RT90 ≤ 20 s (@500 ml/min)
Long-term Stability*	Testing
Temperature	10 °C ~ 50 °C
Tolerance	± 200 ppm @ 50°C (0 ~ 5000 ppm)
(@ 20°C)	± 10%rel @ 50°C (0.5% ~ 5.0%vol)
Zero Temp. Drift	± 500 ppm
Resolution	10 ppm/sec @ 1000 ppm
Reading Unit	ppm
Detection Limit	30 ppm
Reading Refresh Rate	16 Hz

* Long-term stability: 28 days of zero drift measured in clean air of 0 ~ 90% RH, 0 ~ 35 °C

Mechanics

Optic Path	Steel
Circuit Board	FR4 / Lead-free HASL
Solder	Sn / Ag / Cu
Mounting Plate	ABS

Applications


- HCOOH gas monitoring

Merits

- Small size
- Fast response
- Low cross sensitivity
- High reading refresh rate
- RS485 Modbus RTU
- With PTC heating function

Dimensions

- Length: 126 mm ± 1 mm
- Width: 60 mm ± 1 mm
- Height: 34 mm ± 1 mm
- Weight: 188 g ± 5 g
- Screw Hole Diameter: 3 mm

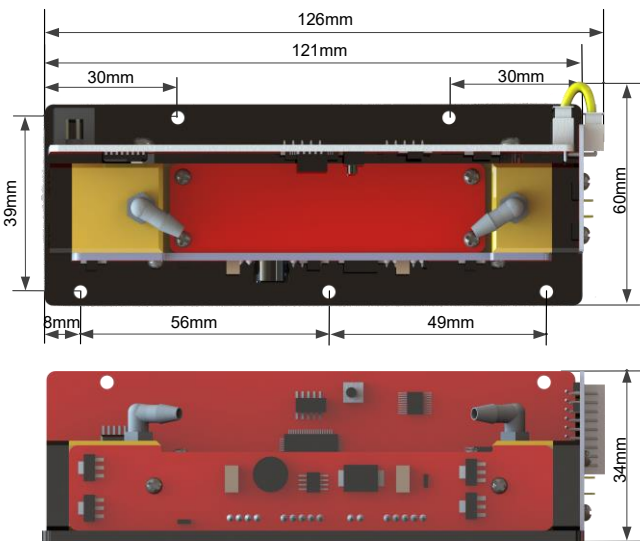

DATASHEET

Electrical Parameters

Input Voltage	9 ~ 24 VDC (#9 pin)
Operating Current	< 0.15 A @9 VDC
Power	< 1 W for Average < 1.5 W @ Peak
PTC Heating Power	≤ 4W @ 5VDC
Warm-up Time	3 minutes (Tolerance ± 200 ppm @ zero) 60 minutes (Tolerance ± 100 ppm @ zero)
Output Voltage	0.4 ~ 2.0 VDC (#2 pin) (0.3 ~ 0.4 V for negative reading)
Warranty	18 months*


Application Condition

Prefer Condition	Room temperature, dry, clean
Safety	None explosion-proof design
Humidity	0% RH ~ 85% RH (No Condensation)
Flow Rate	300 ~ 800 ml/min
Pressure	0.5 ~ 1.5 ATM (Ambient air pressure measured, without pressure compensation)


*Non-warranty Case:

- Polluted by condensation, water or dust; Dust and water removing is strongly suggested;
- Damaged by falling, hitting, disassembling, etching or over-loading;
- Label has been torn.

Connector Definition



1. NC	2. V _{out} (DAC)
3. RXD(TTL)	4. TXD(TTL)
5. A+(RS485)	6. B-(RS485)
7. NC	8. GND
9. PWR DC	10. GND

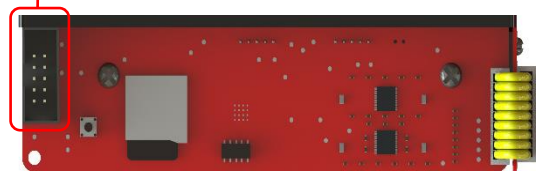

* Communication protocol is modbus RTU.
ID can be modified in SD card.

Accessories Included

Tygon Tube

- Length 50 mm × 2
- Diameter 3.2 mm × 6.4 mm
- Polyethylene, transparent

Ribbon Cable

- Length 200 mm × 1
- 10-pin, 28 AWG, gray
- Female connector, 2 × 5
- 2.54 mm Pitch

* The heating module is not included, but can be purchased as an option.

We reserves the right to modify this datasheet and will optimize the product in the future. If you use this product for specific application, please contact us for more technical support.