


NDIR SO₂F₂ SENSOR MODULE

DATASHEET

LARK-1LMCT SO₂F₂ 100PPM | Order No.: 001-080N-101

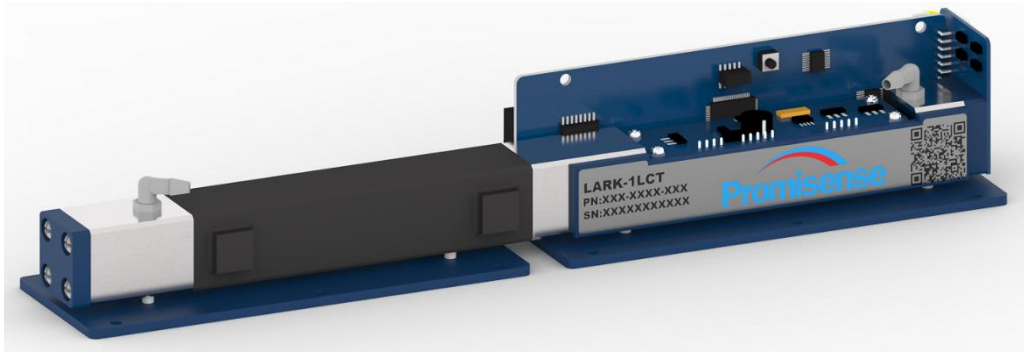

Parameters

Principle	NDIR
Range	0 ~ 100 ppm
Sampling Mode	Pumping
Response Time	≤ 12 s (@500 ml/min)
Recovery Time	≤ 12 s (@500 ml/min)
Long-term Stability*	Drift < ± 5 ppm/mon
Temperature	-10 °C ~ 50 °C
Tolerance	±1.5 ppm @20 °C
Zero Temp. Drift	<7ppm (-10 °C ~ 50 °C)
Resolution	100 ~ 200 ppb/sec @ 0 ppm
Reading Unit	ppb
Detection Limit	300 ppb

*Long-term Stability: 28 days of zero drift measured in clean air of 0~90% RH, 0~35 °C

Applications

- Trace SO₂F₂ gas measuring

Merits


- High Resolution
- Low Detection Limit
- Long Life
- Low humidity interference

Dimensions

- Length: 258 mm ± 1 mm
- Width: 51 mm ± 1 mm
- Height: 39 mm ± 1 mm
- Weight: 540 g ± 5 g
- Screw Hole Diameter: 3 mm

Mechanics

Optic Path	Steel (Gilt internal)
Circuit Board	FR4 / Lead-free HASL
Solder	Sn / Ag / Cu
Mounting Plate	ABS

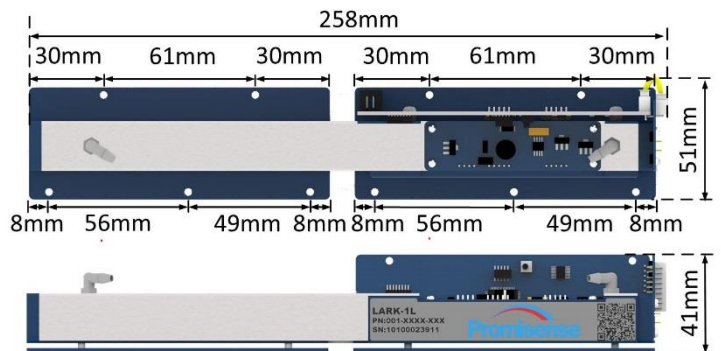

DATASHEET

Electronics

Input Voltage	9 ~ 24 VDC (#9 pin)
Operating Current	< 0.15 A @9 VDC
Power	< 1 W Average < 1.5 W @Peak
PTC Heating Power	< 8 W @ 5 VDC
Warm-up Time	3 minutes (Tolerance ± 3 ppm) 30 minutes (Tolerance ± 1 ppm)
Output Voltage	0.4 ~ 2.0 VDC (#2 pin) (0.3 ~ 0.4 V for Negative Reading)
Warranty	18 months*

Application Condition


Prefer Condition	Room Temperature, Dry, Clean
Safety	None Explosion-proof Design
Temperature	-10 °C ~ 50 °C
Humidity	0% RH ~ 85% RH (No Condensation)
Flow Rate	300 ~ 800 ml/min
Pressure	0.5 ~ 1.5 ATM (Ambient air pressure measured, without pressure compensation)

*Non-warranty Case:


- Polluted by condensation, water or dust; Dust and water removing is strongly suggested;
- Damaged by falling, hitting, disassembling, etching or over-loading;
- Label has been torn.

We reserves the right to modify this datasheet and will optimize the product in the future. If you use this product for specific application, please contact us for more technical support.

Connector Definition



1.ALM	2.V _{out} (DAC)
3.RXD(TTL)	4.TXD(TTL)
5.RXD(RS232)	6.TXD(RS232)
7.CS1*	8.GND
9.PWR DC	10.GND

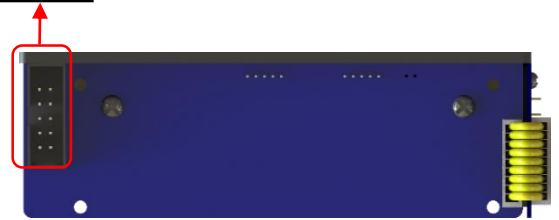

*CS1: 0-3.3 VDC Output, for RS485

Accessory

Tygon Tube

- Length 50 mm × 2
- Diameter 3.2 mm × 6.4 mm
- Polyethylene, Transparent

Ribbon Cable

- Length 400 mm × 1
- 10-pin, 28 AWG, Gray
- Female Connector, 2 × 5
- 2.54 mm Pitch